



L-862 High Intensity Quartz Light

Certified to FAA AC 150/5345-46 (Current Edition)

Installed to define edges of precision instrument runways

Highlights

- ETL Certification ensures performance
- Easy lamp changes through thumbscrew system - no clamp band or inner/outer lens removal
- Durable powder coat finish lasts longer
- Threaded 1.5" frangible coupling or optional 2" matches existing baseplates/stakes
- Actual average lamp life far exceeds 1000 hour rated life for fewer lamp changes
- Available in increased heights for snow country visibility

Toe direction must be specified. Looking at the fixture from the runway center line the color on the left is listed first, followed by the color on the right.



General Catalog Numbers

213Q-□-□□□-□□-□□-□

Column Diameter

1=1"
2=2"

Wattage

120=120W
150=150W
200=200W

Colors

C=Clear
Y=Yellow
R=Red
G=Green
B=Blue
O=Opaque

Overall Height

14=14"
20=20"
24=24"
30=30"
Other heights available

Option

2=Frangible coupling with 2" thread for 1" dia. column

Example: 213Q-1-200-RG-24 is a 213Q fixture with 1" column, 200W lamp, red/green and 24" overall height

Head Assemblies

Includes housing, socket, cord, gasket and lens clamp.

#213Q-X Quartz
 X = Overall height of fixture -14", 20", 24" or 30" - other heights available.

Lamp Socket

#73Q Quartz

Outer Lenses

#248Q Clear
 #248Q-CO Clear/Opaque*
 #248Q-OC Opaque/Clear*
 #256Q-GR Green/Red*
 #256Q-RG Red/Green*
 #52Q Red
 #252Q-GO Green/Obscure*
 #252Q-OG Obscure/Green*
 * Toe direction must be specified. Looking at the fixture from the runway center line the color on the left is listed first, followed by the color on the right.

180° Inner Lenses

#57Q-B Blue
 #57Q-C Clear
 #57Q-G Green
 #57Q-R Red
 #57Q-Y Yellow

Lamps

#103 120W Quartz
 #104 150W Quartz
 #105 200W Quartz

Connector Cords


#766NQ-X Quartz
 X = Overall height of fixture -14", 20", 24" or 30" - other heights available

Columns

#77 6" (14" overall height of fixture)
 #78 12" (20" overall height of fixture)
 #78-16 16" (24" overall height of fixture)
 #79 22" (30" overall height of fixture)
 Other heights available

Other

#60Q Lens Clamp
 #63Q Lens Gasket

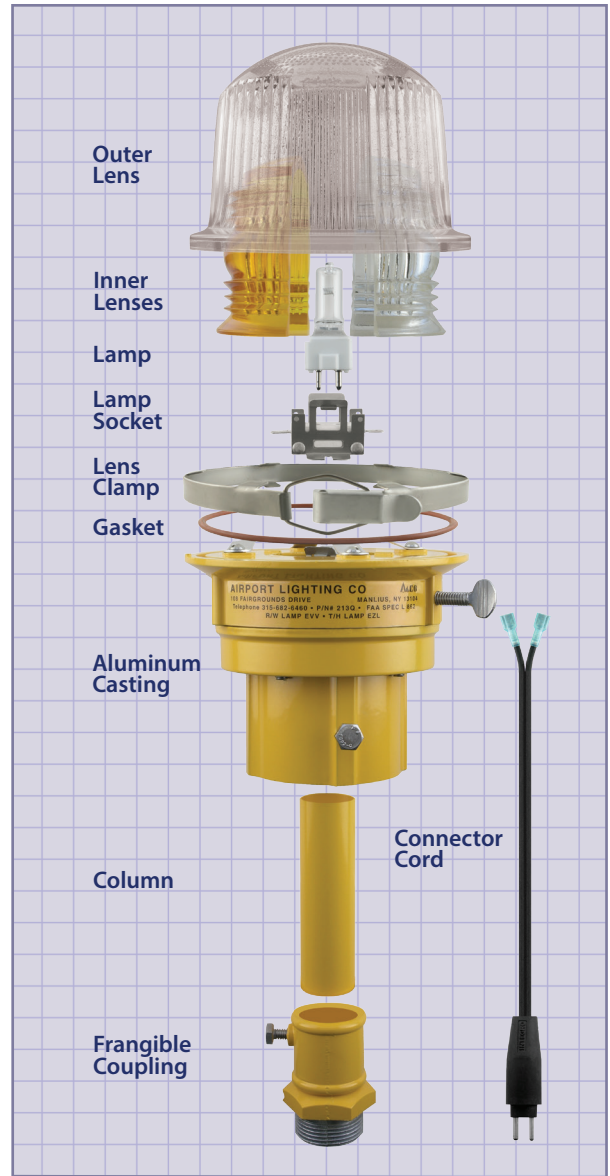

Other (con't)

#58 Frangible Coupling
 1.5" thread for 1" dia. column
 #58-2 Frangible Coupling
 2" thread for 1" dia. column
 #59 Frangible Coupling
 2" thread for 2" EMT column (14" overall height only)
 #59-E-P Frangible Coupling
 2" thread for 2" EMT. column (overall heights greater than 14")

Accessories

#34-4 L-830-4 100W Transformer
 #34-6 L-830-6 200W Transformer
 #82-D4 L-823 Primary Connector Kit - #8 AWG
 #71 L-867B 12" diameter light base
 #72 L-867B 12" diameter base plate